

# Observation of Two-Photon Photoemission Enabled by Early GaAs Laser Diodes from MIT Lincoln Laboratory (1964)

Malvin Carl Teich

Boston University, Boston, Massachusetts 02215  
Columbia University, New York, New York 10014


(12 June 2025)

DOI: [10.13140/RG.2.2.34994.93122](https://doi.org/10.13140/RG.2.2.34994.93122)

---

**Early GaAs laser diodes, generously provided by Bob Keyes, Ted Quist, and Al McWhorter of MIT Lincoln Laboratory when I began my doctoral research at Cornell University, enabled the observation of two-photon photoemission in 1964. A more extensive discussion appears in: *LED Lighting: Devices and Colorimetry* by M. C. Teich (SPIE Press, Bellingham, WA, 2025): <https://spie.org/Publications/Book/100371>**

This contribution highlights the early two-photon photoemission work carried out in the course of my doctoral research at Cornell University, during the period 1963–1966 [1]. The experiments I conducted were enabled by the GaAs laser diode, developed contemporaneously at GE, IBM, and MIT Lincoln Laboratory in 1962 [2]. Several of these devices were generously provided to me by Lincoln Laboratory researchers Bob Keyes, Ted Quist, and Al McWhorter. Use of the device portrayed in Fig. 1 enabled me to experimentally observe two-photon photoemission from sodium metal in 1964 [3,4], as well as to demonstrate the phenomenon of dc photomixing [1,5]. Two-photon photoemission was one of the earliest nonlinear-optical effects to be documented. Some forty years later, the temperature and wavelength dependence of two-photon photoemission from bialkali semiconductors was analyzed [6], and entangled two-photon photoemission was observed [7].

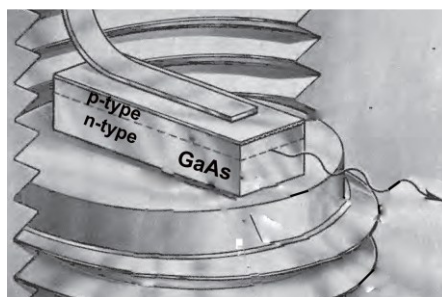

**Figure 1.** Artist's rendering of GaAs laser diode LD256 fabricated at MIT Lincoln Laboratory in 1963. The width and length of the semiconductor regions were  $200\ \mu\text{m}$  and  $1\ \text{mm}$ , respectively. When operated in pulsed mode at  $77\ \text{K}$ , this device emitted coherent light at  $845\ \text{nm}$  [2]. (Image adapted from Fig. 3 on p. 16 of [1].)

Months before having developed the laser diode, Keyes and Quist (Fig. 2) pioneered the first truly useful light-emitting diode [8]. As they reported in July 1962 [9], their GaAs LED, operating CW at room temperature, emitted spontaneous recombination radiation with a peak wavelength of  $920\ \text{nm}$ , in the near-infrared. Despite its wavelength, the light from their new LED was visible — it appeared red to the human eye [9]. I vividly recall my own surprise upon observing red emission from their GaAs laser diode, which operated at liquid-nitrogen temperature and emitted  $845\text{-nm}$  coherent radiation.



**Figure 2. Robert J. Keyes (1927–2012) and Theodore M. Quist (1931–2013),** left and right, respectively, displayed the high-efficiency,  $p$ – $n$  junction light-emitting diode they co-invented while working at MIT Lincoln Laboratory in 1962. Operated at room temperature, this direct-bandgap GaAs semiconductor device generated spontaneous recombination radiation with a peak wavelength at  $\lambda = 920$  nm in the near-infrared. (Courtesy Robert J. Keyes, MIT Lincoln Laboratory.)

As discussed in [10], a substantial body of research, dating to the time of von Helmholtz, has demonstrated that the perception of light by humans extends over a wavelength range far greater than the usually recognized range, which is 380–780 nm. In experiments carried out with lasers operated at five different near-infrared wavelengths, Sliney [11] reported in 1976 that the photopic luminous efficiency function  $V(\lambda)$ , when plotted on semilogarithmic coordinates so the tails of the curve could be resolved, extended over a far broader range of wavelengths, namely 310–1100 nm (the details vary with the radiance of the source and there is variation among individual observers). Sliney further reported that all wavelengths in the 625–1100 nm range appear red to the normal human observer, thereby confirming the original observations of Keyes and Quist.

These early interactions led me to join MIT Lincoln Laboratory in 1966 for my first professional position, in Group 82 under Bob Keyes (Associate Group Leader) and Bob Kingston (Group Leader), with Al McWhorter heading Division 8. My initial project at Lincoln Laboratory focused on implementing heterodyne detection in the mid-infrared, employing the then-new CO<sub>2</sub> laser in conjunction with a Ge photoconductive detector [12,13]. The two detection modalities — heterodyne detection and two-photon direct detection — were subsequently unified by considering two-photon heterodyne photodetection, which admits dc photomixing [14].

Much of this is discussed in my recently published book:

M. C. Teich, *LED Lighting: Devices and Colorimetry*, SPIE Press (Bellingham, WA, 2025).

---

Available editions:

- Softcover and ePDF (SPIE): <https://spie.org/Publications/Book/100371>
  - Hardcover (Amazon): <https://www.amazon.com/dp/B0F54LRDLR>
  - Softcover (Amazon): <https://www.amazon.com/dp/B0F54R91D1>
  - ePDF (Google Play): <https://play.google.com/store/books/details?id=hX9TEQAAQBAJ>
-

## References

- [1] M. C. Teich, *Two Quantum Photoemission and dc Photomixing in Sodium*, Ph.D. Dissertation, Cornell University, Ithaca, NY, February 1966 (Cornell University Library Archive). Available at the Internet Archive: <https://web.archive.org/web/20170701000000/https://people.bu.edu/teich/pdfs/Thesis-PhD-1966-Teich.pdf>
- [2] T. M. Quist, R. H. Rediker, R. J. Keyes, W. E. Krag, B. Lax, A. L. McWhorter, and H. J. Zeiger, Semiconductor Maser of GaAs, *Applied Physics Letters* **1**, 91–92 (December 1962).
- [3] M. C. Teich, J. M. Schroeder, and G. J. Wolga, Double-Quantum Photoelectric Emission from Sodium Metal, *Physical Review Letters* **13**, 611–614 (1964).
- [4] M. C. Teich and G. J. Wolga, Two-Quantum Volume Photoelectric Effect in Sodium, *Physical Review* **171**, 809–814 (1968).
- [5] M. C. Teich and G. J. Wolga, Multiple-Photon Processes and Higher Order Correlation Functions, *Physical Review Letters* **16**, 625–628 (1966).
- [6] M. C. Booth, B. E. A. Saleh, A. V. Sergienko, and M. C. Teich, Temperature and Wavelength Dependence of Fermi-Tail Photoemission and Two-Photon Photoemission from Multialkali Semiconductors, *Journal of Applied Physics* **100**, 023521 (2006).
- [7] M. C. Teich, M. C. Booth, F. Lissandrin, and B. E. A. Saleh, Entangled Two-Photon Photoemission, in preparation (2025).
- [8] R. J. Keyes and T. M. Quist, Recombination Radiation Emitted by Gallium Arsenide (Correspondence), *Proceedings of the IRE* **50**, 1822–1823 (submitted 25 May 1962, published 1 August 1962).
- [9] R. J. Keyes and T. M. Quist, Radiation Emitted by Gallium Arsenide Diodes, presented at the *Solid-State Device Research Conference*, Durham, New Hampshire, 9–11 July 1962; Abstract published in *IRE Transactions on Electron Devices* **9** (6), 503 (July 1962).
- [10] M. C. Teich, *LED Lighting: Devices and Colorimetry* (SPIE, Bellingham, 2025), Example 8.5-1.
- [11] D. H. Sliney, R. T. Wangemann, J. K. Franks, and M. L. Wolbarsht, Visual Sensitivity of the Eye to Infrared Laser Radiation, *Journal of the Optical Society of America* **66**, 339–341 (1976).
- [12] M. C. Teich, R. J. Keyes, and R. H. Kingston, Optimum Heterodyne Detection at 10.6  $\mu\text{m}$  in Photoconductive Ge:Cu, *Applied Physics Letters* **9**, 357–360 (1966).
- [13] M. C. Teich, Infrared Heterodyne Detection, *Proceedings of the IEEE* **56**, 37–46 (1968).
- [14] M. C. Teich, Multiphoton Optical Heterodyne Detection, *IEEE Journal of Quantum Electronics* **QE-11**, 595–602 (1975).

## Keywords / Topics:

Light-emitting diodes, nonlinear optics, photonics, two-photon photoemission, semiconductor physics, GaAs, MIT Lincoln Laboratory, LED history